

Warwick trailers

At Warwick Trailers we manufacture high quality agricultural trailers.

With over 60 years' experience of building Warwick Trailers we've gained a rich heritage which has enabled us to become the experts we are today.

Owned by Ktwo, we are a fast-growing business and proud to offer high quality agricultural trailers worldwide.

Our innovative approach to production techniques, combining the latest 3D computer aided design technology with sound engineering experience, means that the Warwick Trailer range is one of the best available today.

www.warwicktrailers.co.uk



2020 PRODUCT RANGE & PRICING

CONTENTS

Bale Trailer	3
Mono Trailer	5
Drop Side Trailer	7
Drop Deck Low Loader Trailer	9
Optional Extras	11
Tyres	12

BALE

KEY FEATURES

- High quality and heavy-duty trailer.
- Coil sprung drawbar as standard on 12T+ models to minimise shock loading and for increased operator comfort.
- LED road lighting and beacon as standard for maximum visibility.
- 10 stud axles as standard on 10T+ models.
- Fixed hitch, rope hooks and strapping points as standard.
- Low ride height to maximise stability.
- Choice of fixed headboard or front and rear harvest ladders as standard.
- Shot blasted paint preparation, finished with two pack undercoat and a two pack top coat paint.
- 4.5mm tread plate floor as standard.
- Range of tyre options available to suit most requirements.

BALE

SPECIFICATIONS

				MODEL			
	4	6	8	10	12	14	16
Price	£5,840	£6,100	£7,750	£8,000	£10,200	£10,750	£12,300
Design capacity (kg)	4,000	6,000	8,000	10,000	12,000	14,000	16,000
Axle track width (mm)	2,000	2,000	2,000	2,000	2,000	2,000	2,000
Axle beam (mm)	1 x 70 x 70	1 x 70 x 70	2 x 70 x 70	2 x 70 x 70	2 x 90 x 90	2 x 90 x 90	2 x 120 x 120
Brake size (mm)	300 x 60	300 x 60	300 x 60	300 x 60	400 x 80	400 x 80	420 x 180
Axle springs – no. of leaves/leaf size (mm)	Fixed Axle	Fixed Axle	4 Leaf	5 Leaf	5 Leaf	5 Leaf	3 /100 x Parabolic 32T
Floor material	Tread Plate						
Floor thickness (mm)	4.5	4.5	4.5	4.5	4.5	4.5	4.5
Floor bearer size (mm)	60 x 40 x 4						
Floor bearer spacing (mm)	380	380	380	380	380	380	380
Chassis size (mm)	203 x 133 x 30	203 x 203 x 46					
Standard wheels	11.5/80 R15.3	11.5/80 R15.3	12.5/80 R15.3	12.5/80 R15.3	385/65 R22.5	385/65 R22.5	385/65 R22.5
Coil sprung drawbar	Opt.	Opt.	Opt.	Opt.	Std.	Std.	Std.
Leaf sprung drawbar	Opt.						
Fixed hitch	Std.						
Unladen weight (kg)	2,930	3,010	3,400	3,420	3,670	3,850	4,070

	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
Overall length	6,970	22'10"	7,620	25'	8,220	26'11"	9,420	30'10"	10,020	32'10"	10,620	34'10"	11,220	36'9"
Bed length	5,500	18'	6,150	20'	6,750	22'	7,950	26'	8,550	28'	9,150	30'	9,750	32'
Bed width	2,545	8'4"	2,545	8'4"	2,545	8'4"	2,545	8'4"	2,545	8'4"	2,545	8'4"	2,545	8'4"
Axle wheelbase	5,090	16'8"	5,490	18′	5,730	18'9"	6,770	22'2"	7,170	23'6"	7,570	24'10"	7,970	26'1"

MONO

Warwick trakes Warwick trakes

KEY FEATURES

- Mono tipping cylinders give a fast and efficient tip with rapid return/drop and lower oil requirement.
- Coil sprung drawbar as standard on 12T+ models to minimise shock loading and for increased operator comfort.
- LED road lighting and beacon as standard for maximum visibility.
- Hydraulic opening as standard on 14T+ models and auto opening tail door options available.
- 10 stud axles as standard on 10T+ models.
- All tandem axle models feature sprung axle suspension as standard.
- Shot blasted paint preparation, finished with two pack undercoat and a two pack top coat paint.
- Range of tyre options available to suit most requirements.

MONO

SPECIFICATIONS

-				MODEL			
	4	6	8	10	12	14	16
Price	£4,850	£6,200	£9,300	£10,750	£13,700	£18,350	£19,800
Design capacity (kg)	4,000	6,000	8,000	10,000	12,000	14,000	16,000
Volume – grain (m³)	5.5	8.7	10.2	14.0	17.0	18.3	20.7
Volume – silage (m³)				25.5	28.3	30.5	34.5
Axle track width (mm)	1,500	2,000	2,000	2,000	2,000	2,000	2,000
Axle beam (mm)	1 x 60 x 60	1 x 70 x 70	2 x 70 x 70	2 x 90 x 90	2 x 90 x 90	2 x 120 x 120	2 x 120 x 120
Brake size (mm)	250 x 60	300 x 60	300 x 60	400 x 80	400 x 80	420 x 180	420 x 180
Axle springs – no. of leaves / leaf size (mm)	Fixed	Fixed	4 Leaf	2 / 80 x Parabolic 16T	2 / 80 x Parabolic 16T	3 / 100 x Parabolic 32T	3 / 100 x Parabolic 32T
Floor thickness (mm)	4	4	4	5	5	5	5
Coil sprung drawbar	Opt.	Opt.	Opt.	Opt.	Std.	Std.	Std.
Leaf sprung drawbar	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Front viewing window				Opt.	Opt.	Opt.	Opt.
Swivel hitch	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Standard wheels	11.5/80 R15.3	12.5/80 R15.3	12.5/80 R15.3	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5
Unladen weight – grain (kg)	1,550	1,660	1,840	2,050	3,900	4,350	4,575
Unladen weight – silage (kg)	-	-	-	2,375	4,325	4,800	5,050

	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
Overall length	4,360	14'3"	4,970	16'3"	5,580	18'3"	6,670	21'10"	6,950	22'9"	7,310	23'11"	7,910	25'11"
Overall height - grain	1,750	5'8"	1,760	5'9"	1,760	5'9"	2,800	9'2"	2,800	9'2"	2,800	9'2"	2,800	9'2"
Overall height - silage	-	-	-	_	-	-	3,800	12'5"	3,800	12'5"	3,800	12'5"	3,800	12'5"
Internal body length	3,050	10'	3,660	12'	4,270	14'	4,870	15'11"	5,050	16'6"	5,400	17'8"	6,025	19'9"
Internal height - grain	1,000	3'3"	1,000	3'3"	1,000	3'3"	1,500	4'11"	1,500	4'11"	1,500	4'11"	1,500	4'11"
Tipped height - grain	3,550	11'7"	3,620	11'10"	4,090	13'5"	5,750	18'10"	6,000	19'8"	6,300	20'8"	6,775	22'2"
Tipped height - silage	-	-	-				6,320	20'9"	6,550	21'5"	6,850	22'5"	7,325	24'
Average internal width	1,810	5'11"	2,300	7'6"	2,300	7'6"	2,300	7'6"	2,300	7'6"	2,300	7'6"	2,300	7'6"
Maximum external width	1,910	6'3"	2,480	7'11"	2,480	7'11"	2,620	8'7"	2,620	8'7"	2,620	8'7"	2,620	8'7"



DROPSIDE

SPECIFICATIONS

•			MODEL		
	2	4	6	8	10
Price	£3,350	£4,050	£5,600	£8,900	£10,500
Design capacity (kg)	2,000	4,000	6,000	8,000	10,000
Volume – cargo (m³)	1.7	2.5	3.9	5.9	7.0
Axle track width (mm)	1,200	1,500	2,000	2,000	2,000
Axle beam (mm)	1 x 50 x 50	1 x 60 x 60	1 x 70 x 70	2 x 70 x 70	2 x 90 x 90
Brake size (mm)	250 x 60	250 x 60	300 x 60	300 x 60	400 x 80
Axle springs – no. of leaves/leaf size (mm)	Fixed	Fixed	Fixed	4 Leaf	5 Leaf
Floor thickness (mm)	3	3	3	4	4
Side sheet thickness (mm)	3	3	3	3	3
Sprung drawbar	<u> </u>	<u> </u>	Opt.	Opt.	Opt.
Swivel hitch		<u>-</u>	Opt.	Opt.	Opt.
Standard wheels	11.5/80 R15.3	11.5/80 R15.3	12.5/80 R15.3	12.5/80 R15.3	385/65 R22.5
Unladen weight (kg)	1,090	1,430	2,340	3,280	3,460

	r	nm	ft	mm	ft	mm	ft		mm	ft		mm	ft
Overall length	3,860	12'7"	4,45	5 14'7"	5,050	16'6"		5,755	18'10"		6,435	21'1"	
Overall height	1,360	4'5"	1,36	4'5"	1,465	4'9"		1,654	5'5"		1,810	5'11"	
Body length	2,455	8'	2,98) 10'	3,580	12'		4,180	14'		4,860	16'	
Body height	458	1'6"	458	1'6"	458	1'6"		598	1'11"		598	1'11"	
Tipped height	2,820	9'3"	3,29	10'9'	3,825	12'6"		4,445	14'6"		5,040	16'6"	
Average internal width	1,520	4'11"	1,82	5'11"	2,390	7'10"		2,390	7'10"		2,390	7'10"	
Maximum external width	1,610	5'3"	1,91	6'3"	2,480	8'1"		2,480	8'1"		2,480	8'1"	

DROP DECK LOW LOADER

KEY FEATURES

- A drop deck low loader trailer, the trailer body lowers to the ground to allow machinery and loads to be loaded with ease.
- Chequer plate floor as standard.
- Bed is raised and lowered using the tractor hydraulics and two large rams at the rear of the trailer. Giving a loading height of just 180mm (7 inches).

- LED road lighting and beacon as standard for maximum visibility.
- 10 stud axles as standard.
- Hydraulic 400 x 80 brakes as standard.
- Loading ramps included.
- 385/65 R22.5 tyres as standard.
- Shot blasted paint preparation, finished with two pack undercoat and a two pack top coat paint.

DROP DECK LOW LOADER

SPECIFICATIONS

	MODEL	
	7	10
Price	£9,150	£11,000
Design capacity (kg)	7,000	10,000
Axle track width (mm)	2,000	2,000
Axle beam (mm)	1 x 90 x 90	1 x 120 x 120
Brake size (mm)	400 x 80	480 x 120
Floor thickness (mm)	4.5	4.5
Side sheet thickness (mm)	180 x 75	180 x 75
Swivel hitch	Opt.	Opt.
Standard wheels	385/65 R22.5	385/65 R22.5
Unladen weight (kg)	1,520	1,680

	mm	ft	mm	ft
Overall length	7,400	24'3"	8,000	26'2"
Overall width	2,500	8'2"	2,500	8'2"
Load bed length	4,880	16'	5,480	18'
Loading height	180	7"	180	7"_
Raised height	580	1'10"	580	1'10"

OPTIONAL EXTRAS

			МО	DEL	
	Price	BALE	MONO	DROP	DROP
Air / hydraulic brakes c/w air load sensing	£1,550	√	√	√	
Air only c/w load sensing & spring brakes in lieu of hydraulic	£1,350	✓	✓	√	
A.B.S.	£1,300	1	1	1	
Hydraulic brake load sensing valve	£780	/	1	1	
Swivel ring	£360	√	√	√	√
Work lights (pair)	£270	√	√	√	√
Hydraulic jack / manual pump for jack	£450 / £360	✓	✓	✓	
Under run bars (per side)	£450	1	1		
Rear towing eye	£90	/	1		
Hi vis tape	£150	√	√	√	√
Rear hitch c/w 7 pin socket & brake connection	£520		✓		
Reverse light (tipping switch)	£460		/		
Long front mud flaps	£160	1	1		
Steering rear axle, passive (commercial only)	£3,600				✓
Strap box	£250	√	√	√	√
Silage sides 10T & 12T	£2,300		√		
Silage sldes 14T & 16T	£2,550		✓		
Side blow board / rear blow board	£90 / £70		✓		
Manual grain roll-over sheet	£2,200		√		
Silage side lift off frame	£550		1		

		MODEL						
	Price	BALE	MONO	DROP	DROP			
Hyd weigh system - tipping trailer	£1,360		√					
Grain chute / grain sock	£250 / £270		✓					
Cranked hay ladder 1500mm	£320	/						
Hay ladder 1500mm / 900mm	£320 / £275	✓						
Rear round bale support	£190	√						
Coil sprung drawbar	£700	1	✓	1				
Rope hooks	£110	1	✓	√	1			
Bespoke paint colour	£400	1	√	√	1			
Leaf sprung drawbar	£1,600	/	√					
Mudguards / mud flaps	£275	✓	√	√				
Detachable headboard	£385	1						
Screw jack	£320	/	√	√				
Hydraulic rear door 10T & 12T	£2,000		√					
Full width front window	£540		√					
Mesh / solid extension 2T	£775			√				
Mesh / solid extension 4 - 6T	£890			√				
Mesh / solid extension 8 - 10T	£1,000			√				
Axle upgrade (70mm to 90mm)*	£910	/	✓	1				
Axle upgrade (90mm to 120mm commercial)*	£1,550	✓	✓	✓	✓			
Axle upgrade (70mm to 120mm commercial)*	£2,460	√	1	√				

*70mm is 6 stud and 90/120mm are 10 stud




OPTIONAL EXTRAS


TYRE Prices per wheel (£)


•				MODEL		
		Price (per wheel)	BALE	MONO	DROP SIDE	DROP DECK LOW LOADER
	560/60 R22.6 - BKT FL 693M 165D*	£850	✓			
	560/60 R22.5 - Alliance 882 165D*	£810	✓	✓		
9	560/60 R22.5 - Mitas AGRI 165D*	£800	✓	✓		
385/65 R22.5 10 STUD AXLES	560/45 R22.5 - Alliance 882 152D	£810	✓	✓		
385 22.5 1 AXI	560/45 R22.5 - Mitas AGRI 152D	£750	✓	√		
~	550/45 R22.5	£300	✓	✓		
	445/45 R22.5 - Golden Crown AT557 169K	£510	✓	✓		
	445/45 R19.5 - Golden Crown AT556 160J	£430	✓	✓	✓	
Δ.	400/60 R15.5	£140	✓	✓		
12.5/80 R15.3 6 STUD AXLES	385/65 R22.5**	£90	√	✓		
12.5 15.3 (435/65 R19.5**	£295	√	✓		√
œ	550/45 R22.5**	£375	√	√	√	√
1.5/50 R15.3 STUD XXLES	400/50 R15.5	£180	✓	√		
11.5 6 ST AXI	12.5/80 R15.3	£50	√	✓	√	

*Not for high speed over 18 tonnes.

**Requires 90mm axle upgrade.

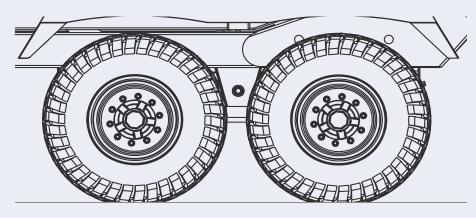

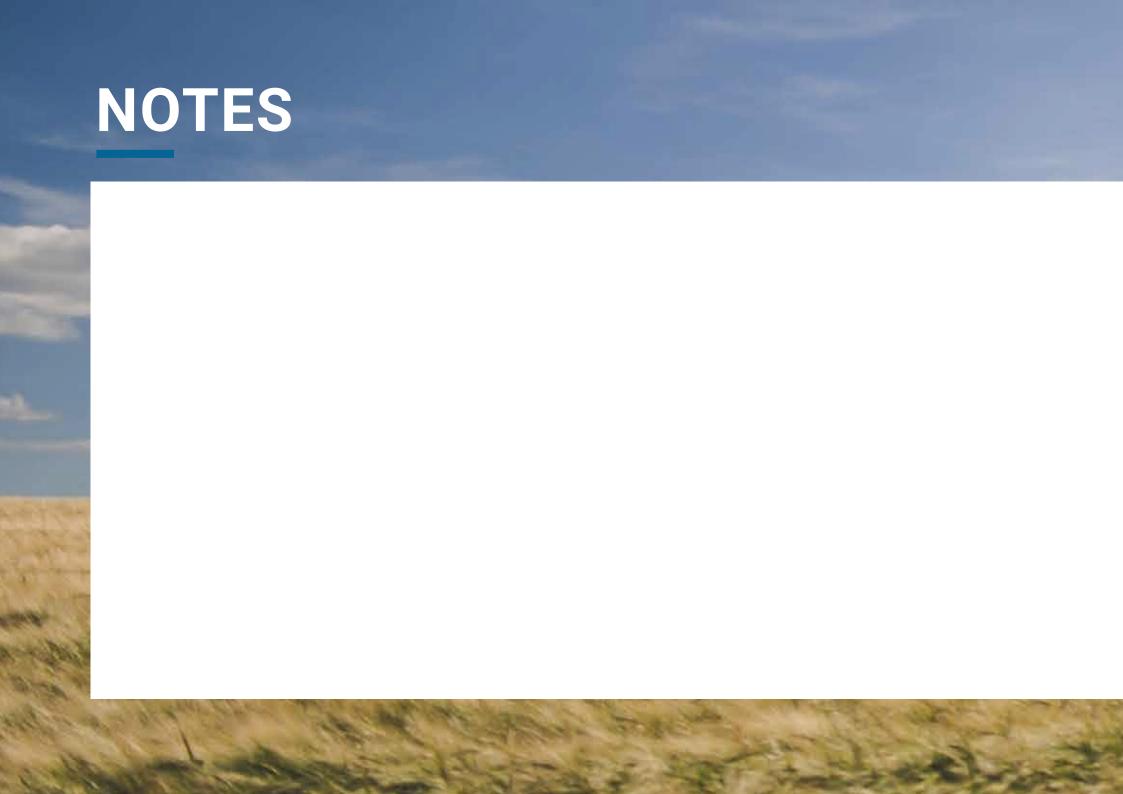

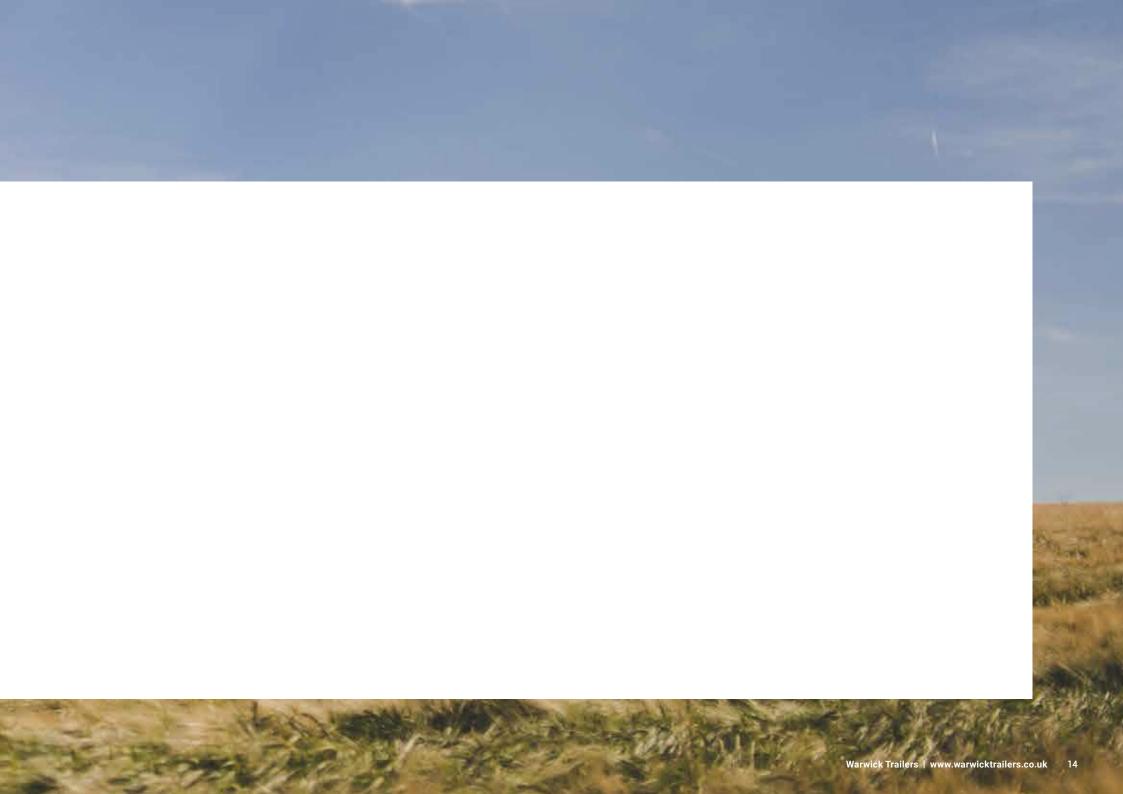

Warwick trailers

Gravel Hill, Shirrell Heath, Southampton, Hampshire SO32 2JQ +44 (0)1844 299290 sales@warwicktrailers.co.uk www.warwicktrailers.co.uk FOLLOW US



